




慈溪市万捷电子有限公司




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

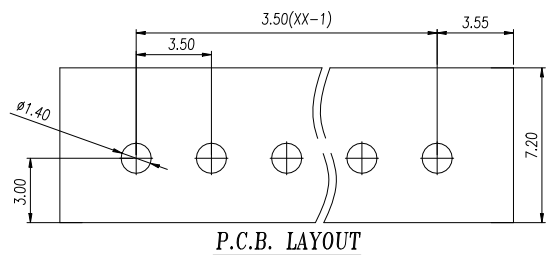

P.C.B. LAYOUT

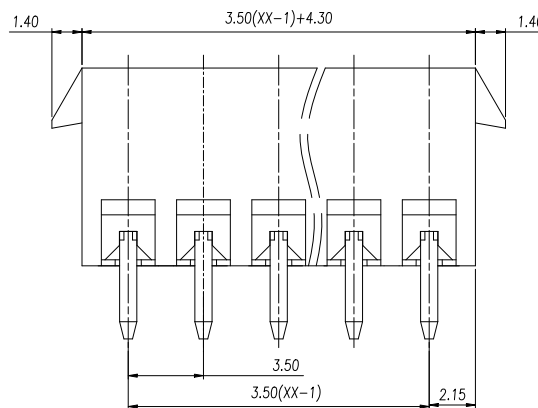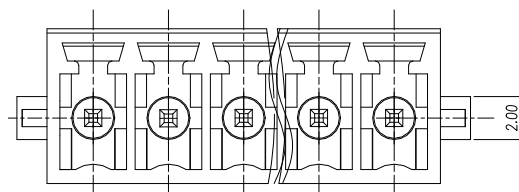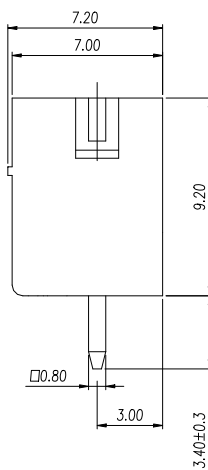

UL/CUL 技术参数 UL1059

UL/CUL	Technical Data	B	C	D
等级	Use Group			
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage			1600V/1Min

IEC 技术参数 IEC 61984

IEC	Technical Data	III	III	II
过电压类别	Overvoltage Category			
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5

导线截面积 Conductor cross section
硬质/柔性导线 Solid/flexible [mm²]

材料	Material
绝缘材料	Insulation Material
阻燃等级	Imflammability
导体材料	Contact Material
导体镀层	Contactive Coating

一般参数	Other Data
间距	Pitch [mm]
极数	Poles [P]
剥线长度	Stripping Length [mm]
螺丝	Screw
扭矩	Torque(Max) [N.m]
工作温度	Operating temperature [°C]

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
名称 / TITLE						WJ15EDGVG-3.5-XXP-1YY-00A		